

**Innovative Method of Deploying MATLAB Based  
Application Across Organization Using MathApps  
- A Web-based Platform**



Presented by:  
**Jannat Manchanda**  
**Saifee Aliakbar**



# Contents

- Introduction
- Application Building and Deployment Process
- MATLAB Tools for Application Building
- Applications Case Studies
- Impact of MathApps



## Introduction

**MISSION:** To strengthen frontloading, standardization of design calculations across product development functions of Auto Farm Sector companies through low fidelity high impact concept simulations.

### Design Calculation

*Quick design calculations based on **analytical/empirical equations***

E.g. Beam deflection calculation

### Physics based Modelling

***Model based simulation** for performance analysis and prediction of system behaviour, including **multi-physics simulation***

E.g. Vibro-acoustics of steering hose


### Engineering Analytics

***Experimental data analysis** and **data-driven modelling** - development of applications to process data, derive meaningful conclusions and generate useful reports.*

E.g. Brake FI Attribute Test Data Analysis.



# Introduction: MathApps

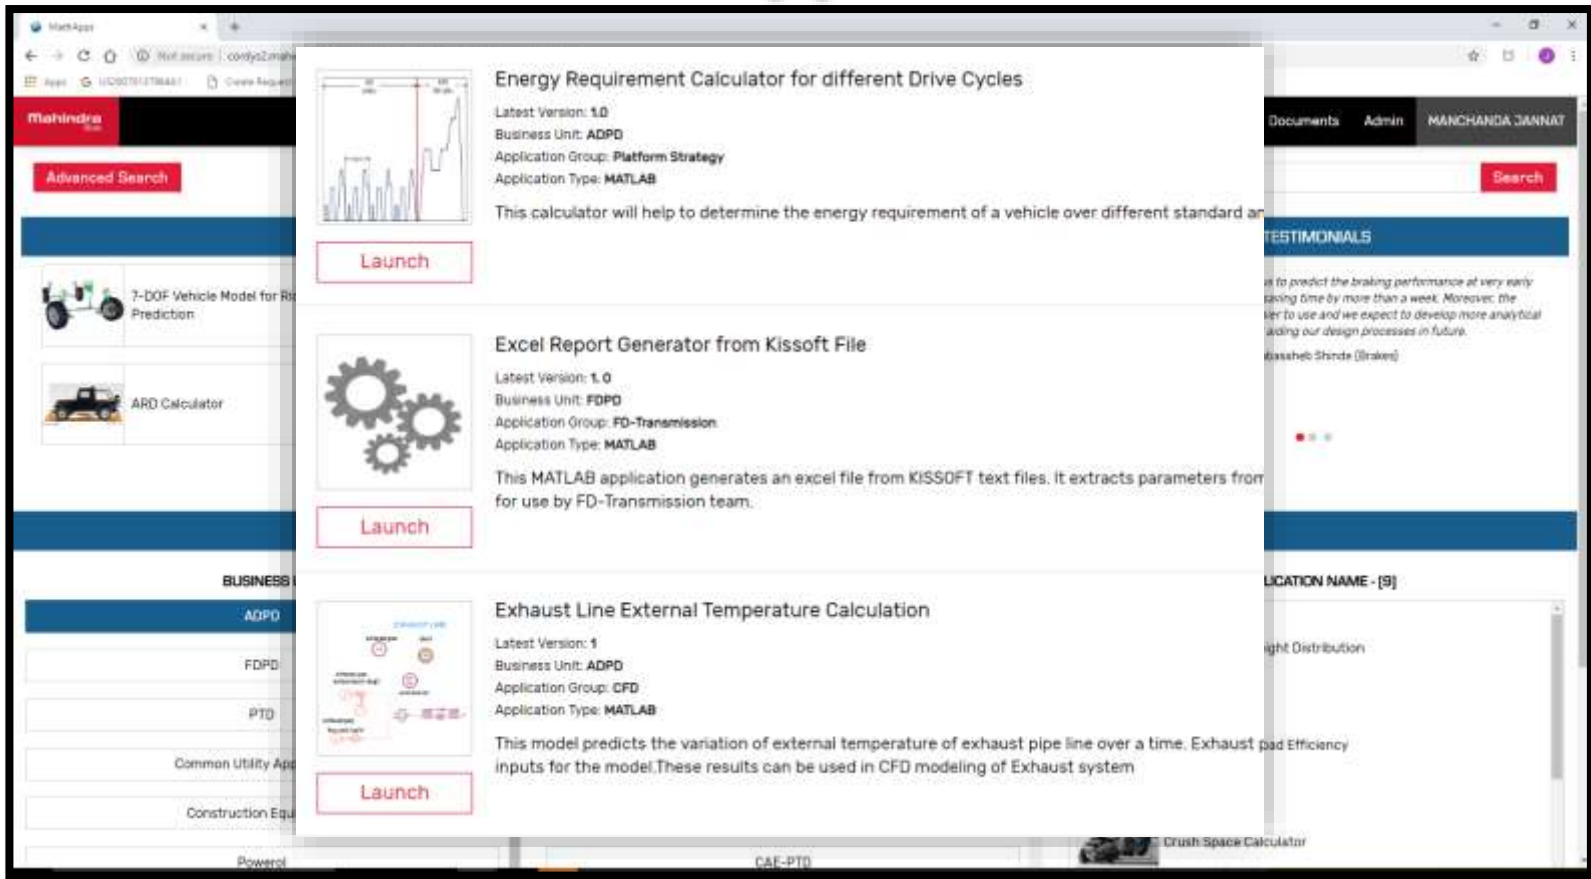


MathApps: Mahindra's enterprise level design calculator portal

- Concept design calculator
- Frontloading designs
- Reduce product lead time
- Power of calculations to all designers at their disposal by leveraging MATLAB's capabilities



# Introduction: MathApps

- The applications are made accessible to the designers through a web browser viz Google Chrome, Internet Explorer etc. and can be run from their workstations without the need to install additional software.
- All applications are restricted for internal use by integration with server-based database and two stage authentications



**Front Loading of Bolted Joints**

Latest Version: 1.0  
Business Unit: Common Utility Applications  
Application Group: Common Automotive Application  
Application Type: MATLAB


This application provides bolt characterization outputs, cover factor calculations, strength of shank and threads, joint separation and contact pressures for Powertrain & Farm division bolted joints.

[Launch](#)

Example Application: Bolt Design Calculator; This application can be directly launched from MathApps



# MathApps Workflow

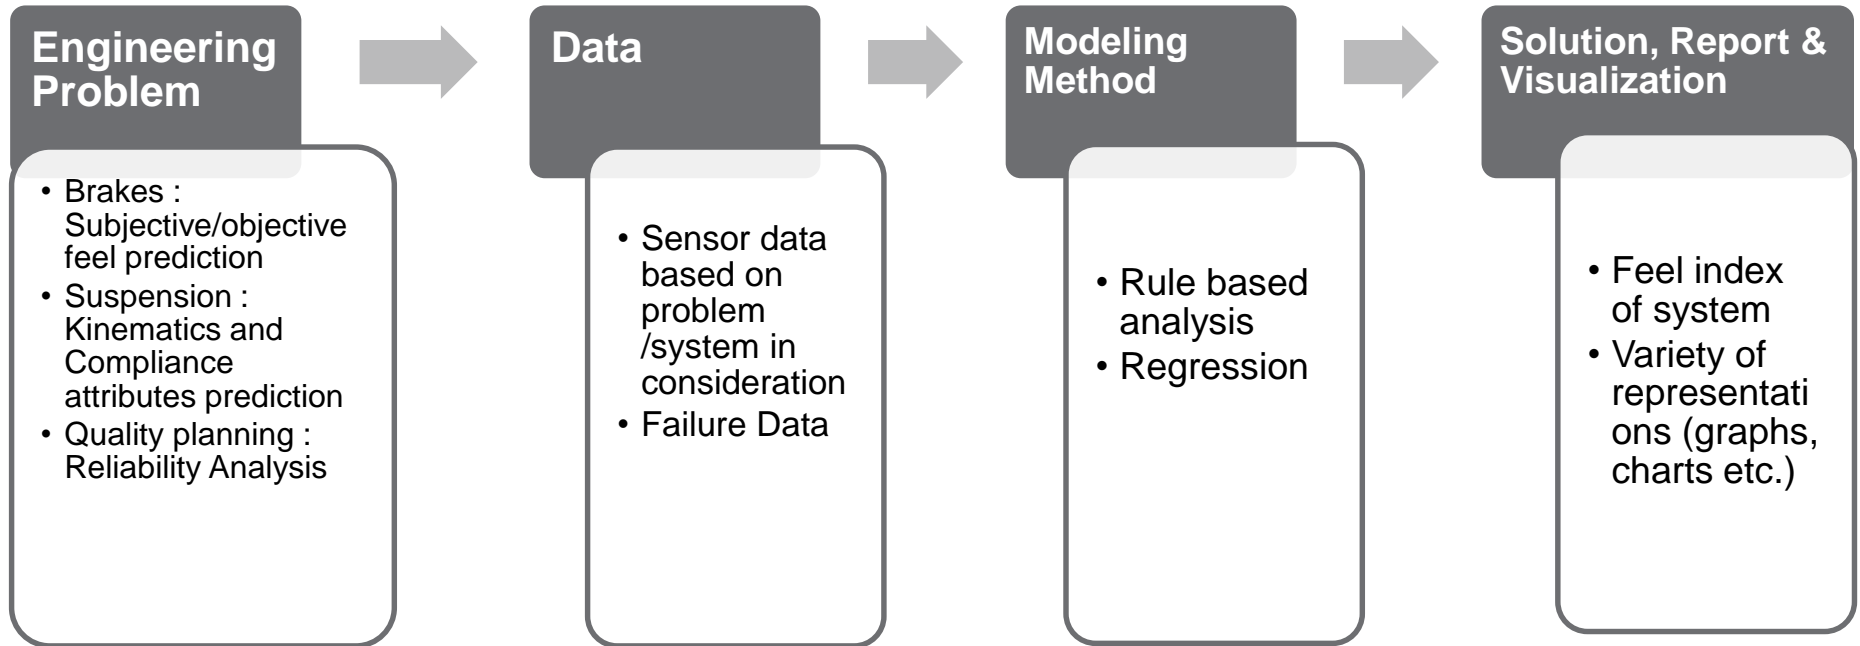



# Application Example: Bolt Joint Analysis

The screenshot displays the Mahindra MathApps web interface. At the top, there is a red navigation bar with the Mahindra logo, 'MSPRINT BUSINESS PROCESS MANAGEMENT', and user information 'MANCHANDA JANNAT'. Below this is a dark navigation bar with 'MathApps' and menu items: Home, About, Documents, Admin, and MANCHANDA JANNAT.

The main content area is divided into a left sidebar and a main panel. The sidebar contains a 'REFINE RESULTS' section with a search box and a 'Clear All Filter' link. Below this are several filter categories: Business Unit, MPDS Gateway, Functional Tags, and Type of Applications. Under 'Type of Applications', there are checkboxes for COMSOL, Galaxy, and MATLAB (which is checked). There is also an 'Application Stage' dropdown menu.

The main panel displays three application cards, each with a thumbnail image, a title, metadata, and a description:

- Exhaust Temperature Prediction:** This model predicts the variation of external temperature of exhaust pipe line over a time. Exhaust pipe may have multiple layers. Temperature and mass flow rate of Exhaust gas are the inputs for the model. These results can be used in CFD modeling of Exhaust system. **Launch**
- Field Performance Prediction:** Latest Version: 1.0, Business Unit: FOPD, Application Group: FD-Tractor Vehicle Integration, Application Type: MATLAB. This application calculates field performance of tractors. It is developed in collaboration with North Eastern Regional Institute of Science and Technology (NERIST). **Launch**
- Front Loading of Bolted Joints:** Latest Version: 1.0, Business Unit: Common Utility Applications, Application Group: Common Automotive Application, Application Type: MATLAB. This application provides bolt characterization outputs, cover factor calculations, strength of shank and threads, joint separation and contact pressures for Powertrain & Farm division bolted joints. **Launch**
- Fuel Tank Temperature Calculation:** Latest Version: 1, Business Unit: FOPD, Application Group: FD-Body, Application Type: MATLAB. This model predicts the fuel tank temperature variation with time. Fuel outlet flow rate to engine, fuel return flow rate to tank are considered. **Launch**

At the bottom of the screenshot, a Windows taskbar is visible with the system clock showing 2:18 PM.

# Why MathApps


- Avoid duplication of efforts
- Centralized repository for all the design front loading
- Automate workflows
- Avoid errors; maintain consistency in results
- Ease of access for users across different Mahindra divisions
- Collaborate with different design teams to create requirement specific applications
- Maintain uniformity in processes
- Increase efficiency: Getting quick and reliable results from MATLAB applications
- Applications from different tools are integrated in MathApps






MathApps

## Different MATLAB Applications Deployed on MathApps

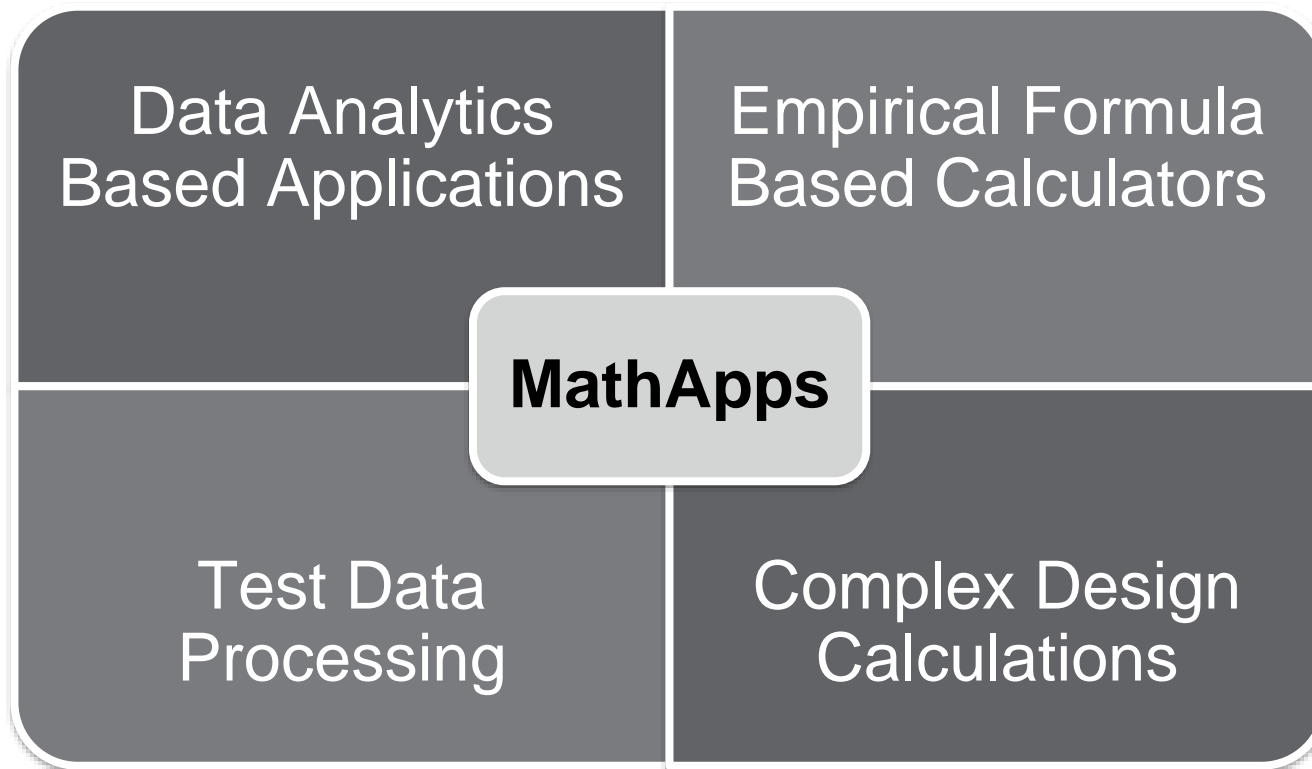




# Application Building and Deployment Process

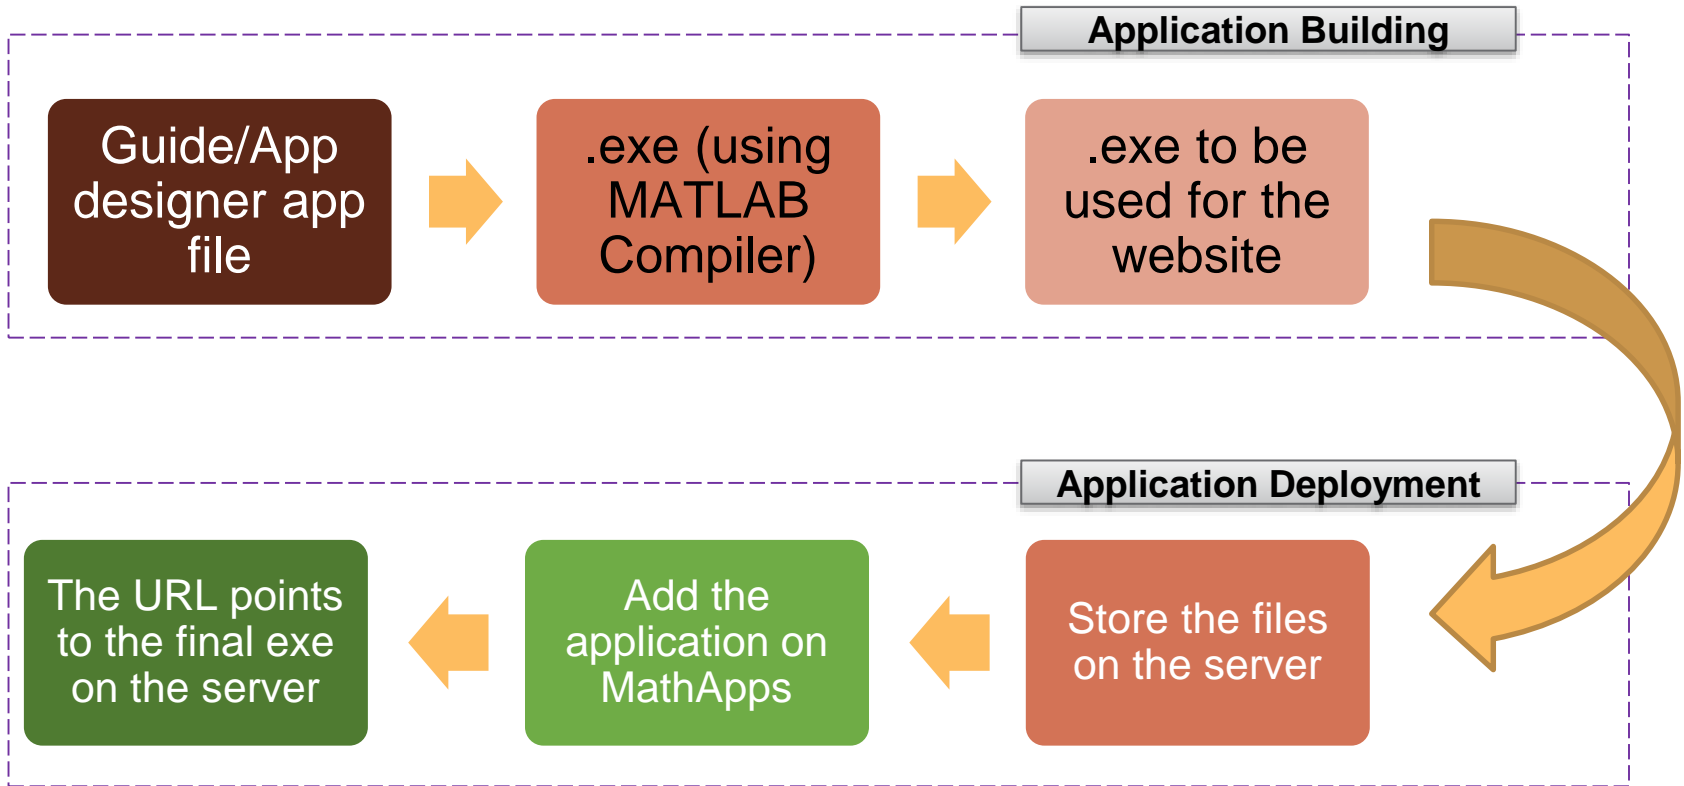




# MATLAB Tools for Application building

## MATLAB App Designer And Guide

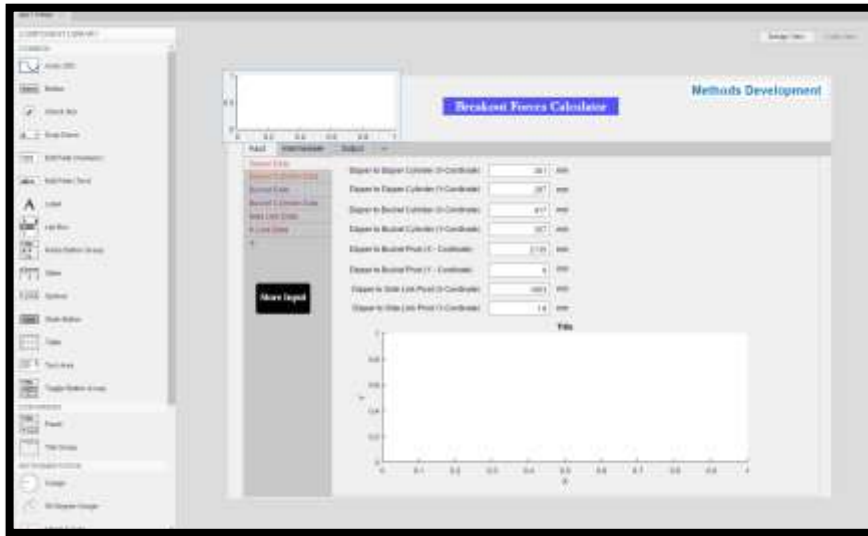

App Designer

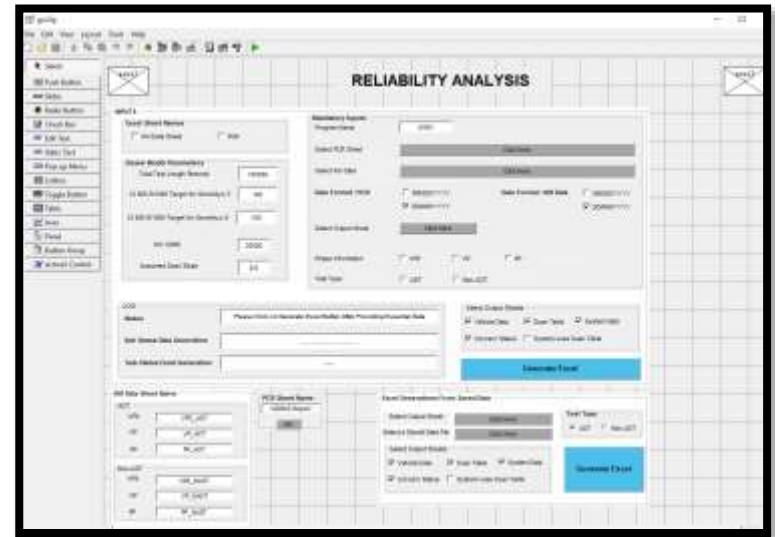

Guide


Methods team at MRV create numerous applications using MATLAB's App Designer and GUIDE. The physics model is converted to a mathematical model which is further written into the code for the application in the form of .mlapp and .m files for App Designer and .fig and .m files for MATLAB Guide.



# MATLAB Tools for Application Building


## MATLAB Application Compiler

- Packages MATLAB programs for deployment as standalone applications.
- This MATLAB generated .exe is deployed for use within MAHINDRA by a GUI created on MATLAB GUIDE.
- Link the generated EXE to MathApps application link, a secondary EXE file needs to be generated which points to the main EXE file generated through MATLAB compiler.

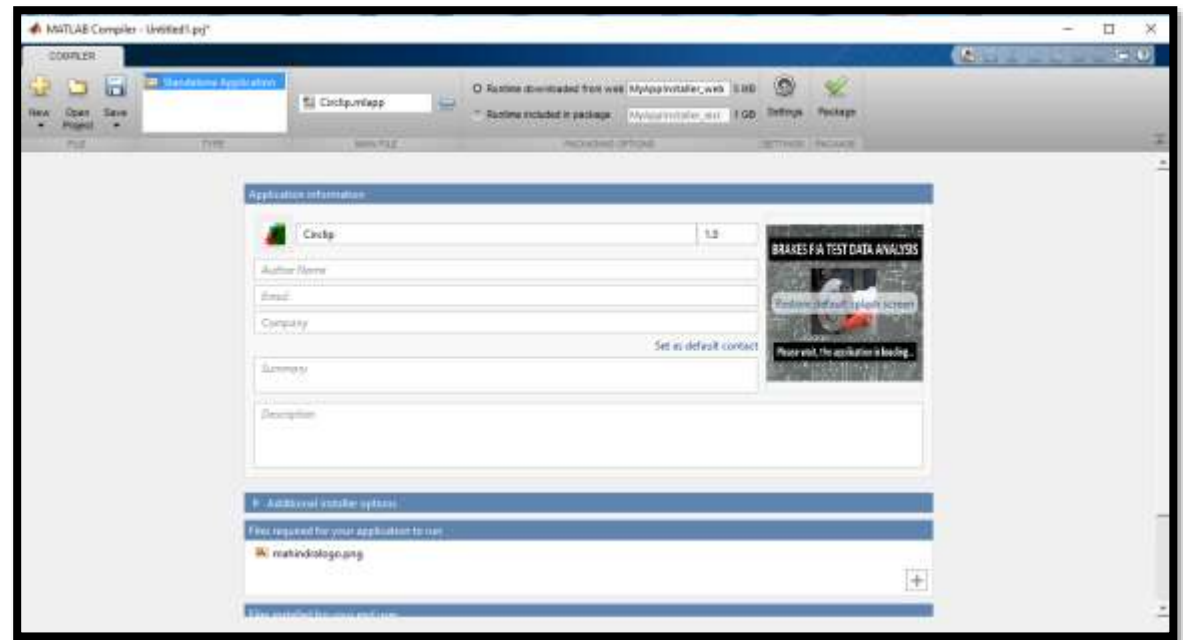

MATLAB Application Compiler

# Application Deployment Process

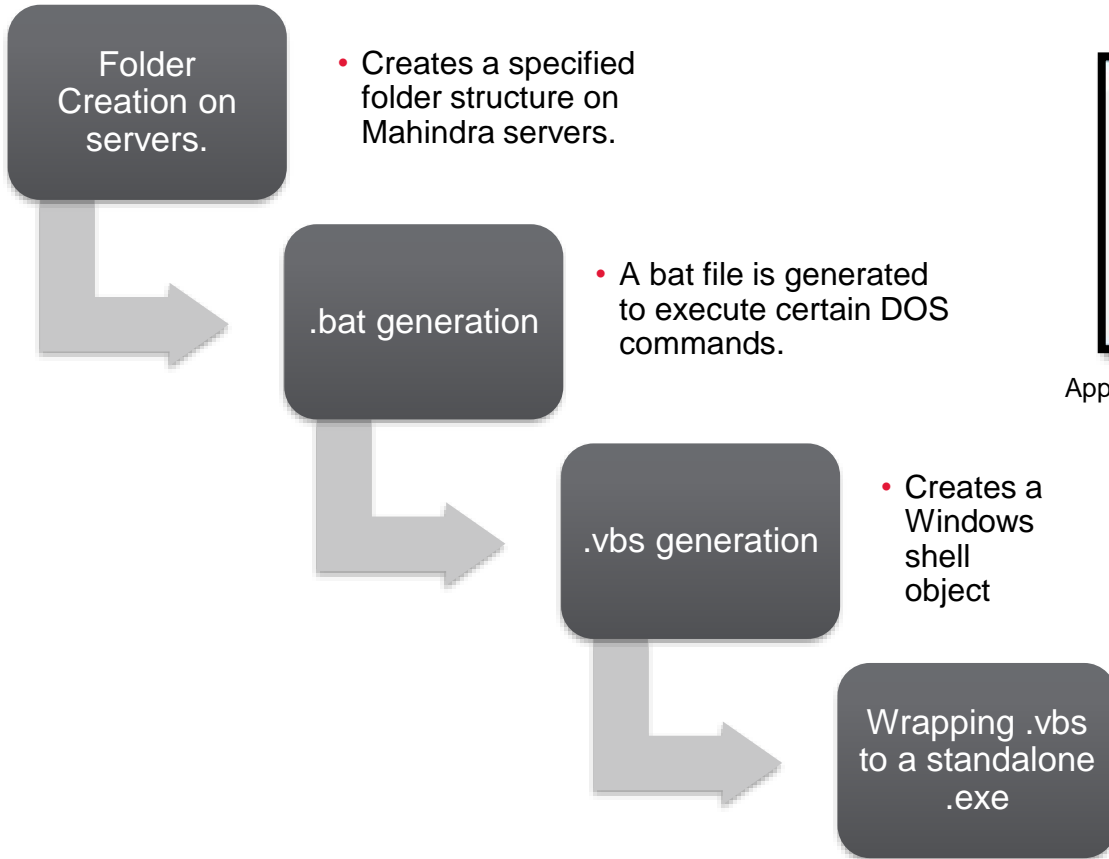


Application built using Guide for MATLAB Application Deployment



# Deployment of MATLAB application on MathApps

- The main reason for this elaborate procedure (Conversion into a secondary exe) is that on directly downloading the exe at the user's system if the system didn't have the MATLAB Compiler Runtime installed it would pop an error.
- By this process the original MATLAB exe is not installed into the user's system; just a secondary exe is installed which points to the original exe stored at the server.



## Front Loading of Bolted Joints

Latest Version: 1.0

Business Unit: Common Utility Applications

Application Group: Common Automotive Application

Application Type: MATLAB

This application provides bolt characterization outputs, cover factor calculations, strength of shank and threads, joint separation and contact pressures for Powertrain & Farm division bolted joints.

Launch



# Case Studies

**Mahindra Rise** | **VEHICLE PERFORMANCE TEST CALCULATION** | Methods Development Group

**Test Data Analysis**

**In Through**

Status: In Gear analysis complete

Gear	Characteristics	1st G	2nd G	3rd G
3-4		11.7	11.7	11.7
4-5		22.5	22.5	22.5
5-6		33.3	33.3	33.3
6-7		44.1	44.1	44.1
7-8		54.9	54.9	54.9
8-9		65.7	65.7	65.7
9-10		76.5	76.5	76.5
10-11		87.3	87.3	87.3
11-12		98.1	98.1	98.1
12-13		108.9	108.9	108.9
13-14		119.7	119.7	119.7
14-15		130.5	130.5	130.5
15-16		141.3	141.3	141.3
16-17		152.1	152.1	152.1
17-18		162.9	162.9	162.9
18-19		173.7	173.7	173.7
19-20		184.5	184.5	184.5
20-21		195.3	195.3	195.3
21-22		206.1	206.1	206.1
22-23		216.9	216.9	216.9
23-24		227.7	227.7	227.7
24-25		238.5	238.5	238.5
25-26		249.3	249.3	249.3
26-27		260.1	260.1	260.1
27-28		270.9	270.9	270.9
28-29		281.7	281.7	281.7
29-30		292.5	292.5	292.5
30-31		303.3	303.3	303.3
31-32		314.1	314.1	314.1
32-33		324.9	324.9	324.9
33-34		335.7	335.7	335.7
34-35		346.5	346.5	346.5
35-36		357.3	357.3	357.3
36-37		368.1	368.1	368.1
37-38		378.9	378.9	378.9
38-39		389.7	389.7	389.7
39-40		400.5	400.5	400.5
40-41		411.3	411.3	411.3
41-42		422.1	422.1	422.1
42-43		432.9	432.9	432.9
43-44		443.7	443.7	443.7
44-45		454.5	454.5	454.5
45-46		465.3	465.3	465.3
46-47		476.1	476.1	476.1
47-48		486.9	486.9	486.9
48-49		497.7	497.7	497.7
49-50		508.5	508.5	508.5
50-51		519.3	519.3	519.3
51-52		530.1	530.1	530.1
52-53		540.9	540.9	540.9
53-54		551.7	551.7	551.7
54-55		562.5	562.5	562.5
55-56		573.3	573.3	573.3
56-57		584.1	584.1	584.1
57-58		594.9	594.9	594.9
58-59		605.7	605.7	605.7
59-60		616.5	616.5	616.5
60-61		627.3	627.3	627.3
61-62		638.1	638.1	638.1
62-63		648.9	648.9	648.9
63-64		659.7	659.7	659.7
64-65		670.5	670.5	670.5
65-66		681.3	681.3	681.3
66-67		692.1	692.1	692.1
67-68		702.9	702.9	702.9
68-69		713.7	713.7	713.7
69-70		724.5	724.5	724.5
70-71		735.3	735.3	735.3
71-72		746.1	746.1	746.1
72-73		756.9	756.9	756.9
73-74		767.7	767.7	767.7
74-75		778.5	778.5	778.5
75-76		789.3	789.3	789.3
76-77		800.1	800.1	800.1
77-78		810.9	810.9	810.9
78-79		821.7	821.7	821.7
79-80		832.5	832.5	832.5
80-81		843.3	843.3	843.3
81-82		854.1	854.1	854.1
82-83		864.9	864.9	864.9
83-84		875.7	875.7	875.7
84-85		886.5	886.5	886.5
85-86		897.3	897.3	897.3
86-87		908.1	908.1	908.1
87-88		918.9	918.9	918.9
88-89		929.7	929.7	929.7
89-90		940.5	940.5	940.5
90-91		951.3	951.3	951.3
91-92		962.1	962.1	962.1
92-93		972.9	972.9	972.9
93-94		983.7	983.7	983.7
94-95		994.5	994.5	994.5
95-96		1005.3	1005.3	1005.3
96-97		1016.1	1016.1	1016.1
97-98		1026.9	1026.9	1026.9
98-99		1037.7	1037.7	1037.7
99-100		1048.5	1048.5	1048.5

**Bolt and Joint Properties**

Minimum: 18 Maximum: 22 N-m

Angle Tightening: 85 55 80

Coefficient of Friction Between:

Threads (m, L):

Bot Head & Washer/Component:

Components:

External Longitudinal Load:  N

External Transverse Load:  N

Vibration Amplitude:  mm

Cone Angle (beta):

Minimum Outer In-plane Diameter (D):

**Nut Parameters**

Nut Outer Diameter:  mm

Nut Inner Diameter:  mm

**Washer Parameters**

Inner Diameter of Washer:  mm

Outer Diameter of Washer:  mm

Thickness of Washer:  mm

**Bolted Part Parameters**

Height of Component (H):  mm

Height of Bolt (H<sub>b</sub>):  mm

**Bolt Parameters**

Major Diameter of Threads (d):  mm

Pitch of Threads (p):  mm

Length of Shank (L<sub>s</sub>):  mm

Length of Unengaged Thread (L<sub>un</sub>):  mm

Length of Engaged Thread (L<sub>e</sub>):  mm

Thread Angle (beta):

Inner Contact Diameter of Bolt Head (d<sub>i</sub>):  mm

Outer Contact Diameter of Bolt Head (d<sub>o</sub>):  mm

**Bolt - Nut configuration**

**Tapped/Integrated bolt configuration**

**Mahindra Rise** | **CAE MATERIAL DATABASE** | Methods Development Group

**Material Database**

Linear NonLinear Compare Add Material Generate Deck Delete Record Database Changes Record

Database:  AD  FD

Search by:

Material Name:

Young's Modulus:

Density:

Poisson's Ratio:

Yield Strength:

Alternating Endurance Limit:

Pubating Endurance Limit:

UTS:

Percentage Elongation at Failure:

Used On Part:

Data Reference:

ID	Material Name	Young's Modulus	Density	Poisson's Ratio	Yield Strength	Type
82	MM21 D	210000	7.8000e-09	0.3000	140	Steel
83	MM21 DD	210000	7.8000e-09	0.3000	160	Steel
84	MM22 EDD	210000	7.8000e-09	0.3000	150	Steel
85	MM22 OD	210000	7.8000e-09	0.3000	170	Steel
86	MM22 RDS	210000	7.8000e-09	0.3000	140	Steel
87	MM22 RDS	210000	7.8000e-09	0.3000	120	Steel
88	MM22 RDS	210000	7.8000e-09	0.3000	100	Steel
89	MM22 RDS	210000	7.8000e-09	0.3000	170	Steel
90	MM21 D	210000	7.8000e-09	0.3000	170	Steel
91	MM21 DD	210000	7.8000e-09	0.3000	170	Steel
92	MM11 EDD	210000	7.8000e-09	0.3000	170	Steel
93	MM13 338	210000	7.8000e-09	0.3000	205	Steel
94	MM13 388	210000	7.8000e-09	0.3000	235	Steel
95	MM13 519	210000	7.8000e-09	0.3000	350	Steel
96	MM23 9 245	210000	7.8000e-09	0.3000	240	Steel
97	MM23 9 305	210000	7.8000e-09	0.3000	300	Steel
43	BSK 480 M	210000	7.8000e-09	0.3000	480	Steel
45	MM13 415	210000	7.8000e-09	0.3000	255	Steel

**Roll Over protection Analysis**

WOPS | LONGITUDINAL LOADCASE

Input Parameters

Output Results




MathApps

# Case Study - 1

## Vehicle Performance Test Calculation

Performs analysis on sensor data to calculate the performance of the Vehicle in different gears for different tests: IN Gear test and THROUGH Gear test.





**VEHICLE PERFORMANCE TEST CALCULATION**

Methods Development Group

input
Analysis
Output

Gear	Speed Range	Up	Down
1	3-7	1,1,1	7,7,7
2	4-9	2,2,2	8,8,8
3	6-12	3,3,3	9,9,9
4	10-15	4,4,4	10,10,10
5	15-25	5,14,14	11,12,13
6	20-35	15,16,17	18,19,20
7	35-55	21,24,25	22,23,
8	35-55	27,29,	28,30,


File Number	Time(seconds)
3	3.8
3	3.6
3	3.6

Time(seconds)	Speed(km/hr)	Engine RPM	Distance(m)
0.00	5.74	829.70	162.17
0.10	5.83	873.06	162.34
0.20	5.91	881.55	162.50
0.30	6.07	856.97	162.66
0.40	6.32	835.06	162.84
0.50	6.54	855.18	163.02
0.60	6.52	896.75	163.20
0.70	6.62	990.79	163.38
0.80	6.78	1005.38	163.57
0.90	6.97	999.57	163.76
1.00	7.17	978.56	163.95
1.10	7.37	996.89	164.16
1.20	7.60	1076.85	164.36

In


Through

File Directory: D:\PROJECT\F19\002\_MTB01 Browse

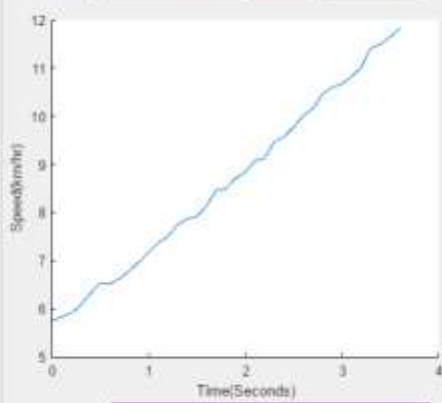

**Status** In Gear analysis complete

**Impact:** Previously done using Excel, after automating through MATLAB, saves 3-4 hours.

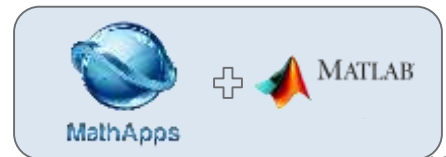





MathApps


# Case Study - 2

## CAE Material Database


This app offers a centralized Material Database for CAE users allows the user to perform various operations on a list of materials: Search, Compare, Update, Deck Export

CAE MATERIAL DATABASE

ID	Material Name	Young's Modulus	Density	Poisson's Ratio	Yield Strength	Type
82	MMQ1 D	210000	7.8000e-08	0.3000	160	Steel
83	MMQ1 DD	210000	7.8000e-08	0.3000	160	Steel
84	MMQ1 EDD	210000	7.8000e-08	0.3000	150	Steel
85	MMQ1 GA	210000	7.8000e-08	0.3000	170	Steel
86	MMQ2 F25	210000	7.8000e-08	0.3000	140	Steel
87	MMQ2 F38	210000	7.8000e-08	0.3000	126	Steel
88	MMQ2 F27	210000	7.8000e-08	0.3000	100	Steel
89	MM11 D	210000	7.8000e-08	0.3000	170	Steel
90	MM11 DD	210000	7.8000e-08	0.3000	170	Steel
91	MM11 EDD	210000	7.8000e-08	0.3000	170	Steel
92	MM11 GA	210000	7.8000e-08	0.3000	170	Steel
93	MM13 330	210000	7.8000e-08	0.3000	205	Steel
94	MM13 360	210000	7.8000e-08	0.3000	230	Steel
95	MM13 510	210000	7.8000e-08	0.3000	350	Steel
96	MM21 F 260	210000	7.8000e-08	0.3000	200	Steel
97	MM21 F 360	210000	7.8000e-08	0.3000	300	Steel
43	DDK 480 M	210000	7.8000e-08	0.3000	400	Steel
45	MM12 410	210000	7.8000e-08	0.3000	200	Steel

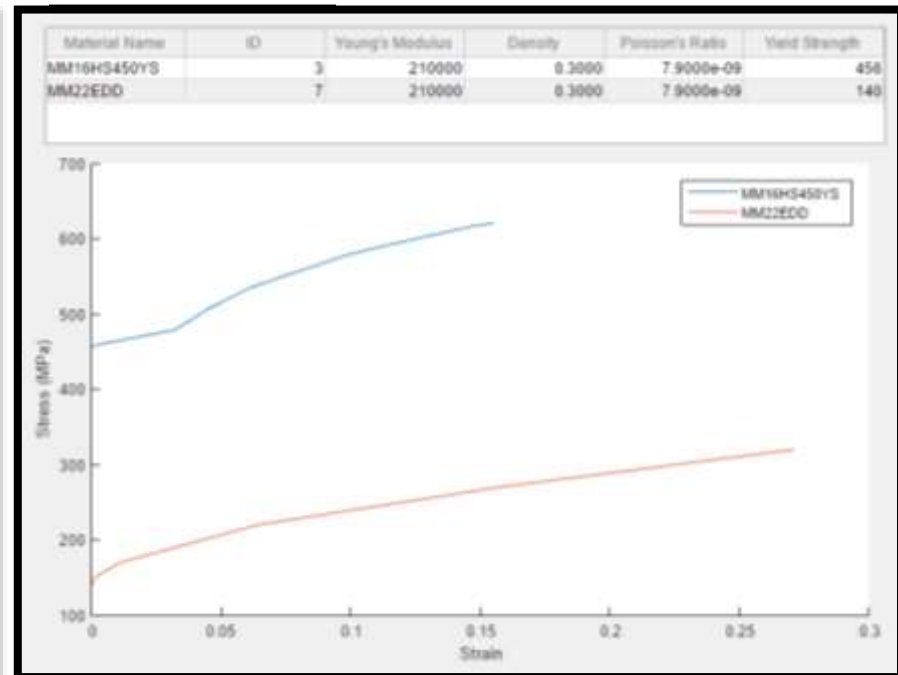

**Impact:** Easy comparison between materials being used in automotive and farm division. Nastran deck can be generated for different materials which can be directly used for simulation.

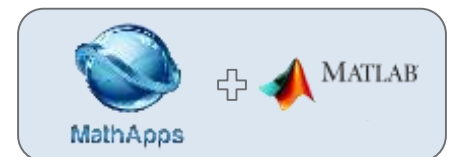



# Case study - 3

## Bolt Calculator

An integrated bolt calculator for catering the need of FD-CAE and CAE-PTD.

### Bolt and Joint Properties

	Minimum	Maximum	
Direct Torque	18	22	N-m
Angle Tightening	85	95	deg

**Coefficient of Friction between** [Friction Coefficient Data](#)

	Minimum	Maximum
Threads (mu_n)	0.1	0.14
Bolt Head & Washer/Component	0.1	0.14
Components	0.1	0.14

External Longitudinal Load: 8500 N  
External Transverse Load: 15100 N [Square](#)

Vibration Amplitude: 0 mm  
Cone Angle (theta): 30 deg [Square](#)  
Minimum Outer In-plane Diameter (D): 13.75 mm

### Nut Parameters

Nut Outer Diameter: 40 mm  
Nut Inner Diameter: 8 mm

### Washer Parameters



Inner Diameter of Washer: 8 mm  
Outer Diameter of Washer: 15 mm  
Thickness of Washer: 4 mm



### Bolted Part Parameters

Thickness of Component 1 (t\_1): 20.9 mm  
Thickness of Component 2 (t\_2): 12.56 mm


### Bolt Parameters

Major Diameter of Threads (d)	8 mm	<a href="#">Square</a>
Pitch of Threads (p)	1 mm	
Length of Shank (L_s)	4.7 mm	<a href="#">Square</a>
Length of Unengaged Thread (L_uet)	22.5 mm	
Length of Engaged Thread (L_et)	12.8 mm	
Thread Angle (beta)	60 deg	
Inner Contact Diameter of Bolt Head (d_i)	8.25 mm	<a href="#">Square</a>
Outer Contact Diameter of Bolt Head (d_o)	14.8 mm	

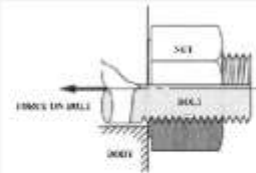

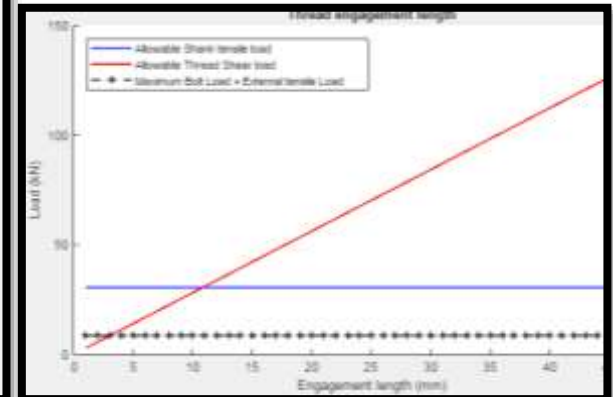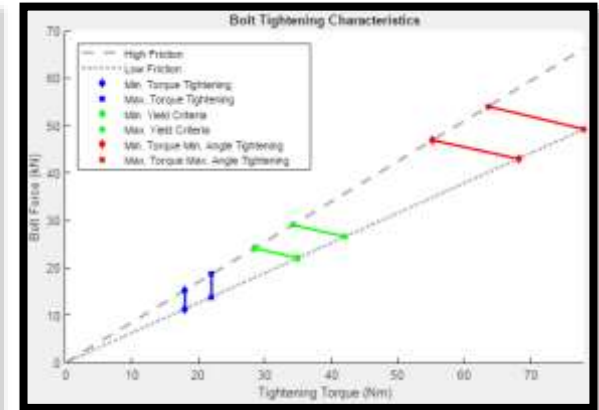
**Impact:** Single point for multiple calculations related to Bolts.

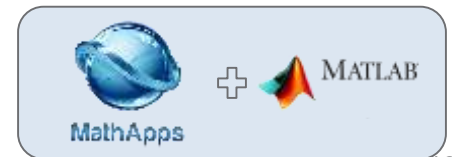

# Case study - 4

## Non-Linear Structure - ROPS

- This tool performs Non-Linear Structural Analysis on a parametric tractor ROPS (for Longitudinal Load Case) according to OECD Code-4.
- The Elasto-plastic material behavior is approximated in the form of a bi-linear stress-strain curve.

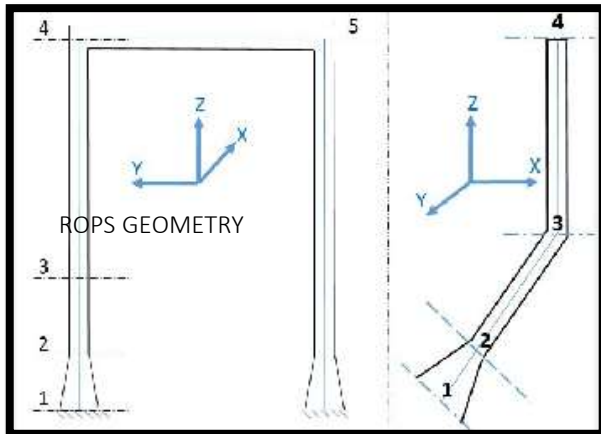

- Geometric parameters
- Material Properties
- Vehicle Parameters

Titled Geometry Data

	x (mm)	y (mm)	z (mm)	Height (mm)	Width (mm)	Thickness (mm)
P1	0	0	0	100	50	7
P2	61.5000	0	126.0000	100	50	7
P3	200	0	500	100	50	6
P4	200	0	1300	100	50	6
P5	200	-250	1300	100	50	6

Material Data

Steel

Constraint Data


	X	Y	Z
Seat Reference Point	-200	0	0
Rear Seat Point	-1050	0	500
Steering Point	-1050	0	500
Bonnet Point	-1050	0	400

Steering Radius: 50

Allowable Clearance (mm): 0

Tractor Mass (Kg): 2000

Required Longitudinal Deformation Energy (Joule): 1.4 \* Tractor Mass

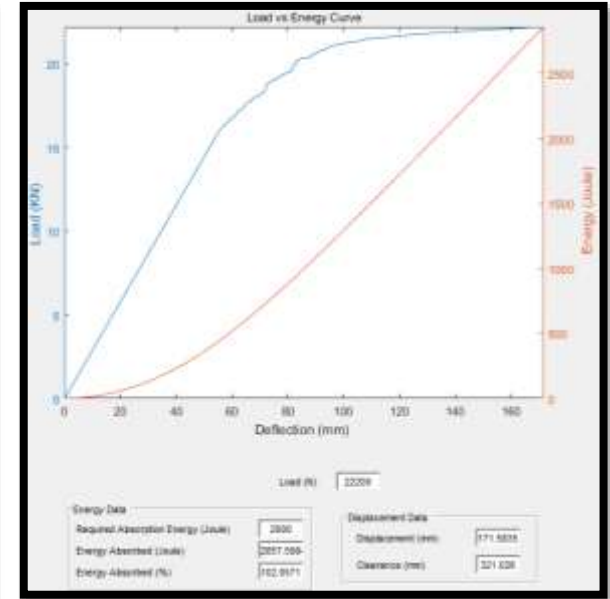

Impact: CAE : 2-3 hours MathApps: 5 minutes



# Impact of MATLAB

Without MATLAB	With MATLAB through MathApps
Design calculations not easily accessible to everyone	Easy access to designers throughout the organization
Formulas being used varies which increases errors	Maintains uniformity of the calculations
Time Consuming	Processes and calculations are automated: Saves time

## Excel

Female thread shear strength	$T_f$	260.00	MPa
Bolt shear strength	$T_b$	600.00	MPa
External tensile load	$L_k$	28	kN
External transverse Load	$L_y$	5	kN
Applied Torque	$T$	0	Nm
Distance from the torque axis to bolt axis	$x$	1	mm
Vibration amplitude	$a$	0	mm
<b>Output parameters</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>
Bolt preload	$F$	51.886	kN
Tightening torque	$T$		N-m
Tensile stress due to preload	$\sigma$	615.7	MPa
Critical slippage	$S_{cr}$	0.96	mm
Shear stress	$\tau$	59.33	MPa
Bolt shearing		No	
Bolt joint loosening		No	
Total tensile stress (Preload+external load)	$\sigma_t$	666.4	MPa
Min length of thread engagement	$L_{er}$	12.5	mm
Distance between bolts fro leak proof joint		40.7	mm
Crushing Stress		152.9	
Total stress		674.31	MPa
Total stress to Bolt yield strength ratio		75%	
<b>Calculations</b>	<b>Symbol</b>	<b>Value</b>	<b>Unit</b>

Calculator Comparison Instruction Sheet1 +

## MATLAB

**Bolt and Joint Properties**

Direct Torque: Minimum 18, Maximum 22 N-m  
 Angle Tightening: 80, 90 deg  
 Coefficient of Friction between: **Friction Coefficient Only**  
 Threads (m<sub>1</sub>): 0.5, 0.14  
 Bolt Head & Washer Component: 0.5, 0.14  
 Components: 0.5, 0.14  
 External Longitudinal Load: 1000 N  
 External Transverse Load: 1000 N  
 Vibration Amplitude: 0 mm  
 Cone Angle (theta): 30 deg  
 Minimum Outer Insipane Diameter (D): 13.75 mm

**Nut Parameters**  
 Nut Outer Diameter: 40 mm  
 Nut Inner Diameter: 8 mm

**Washer Parameters**  
 Inner Diameter of Washer: 1 mm  
 Outer Diameter of Washer: 17 mm  
 Thickness of Washer: 1 mm

**Bolled Part Parameters**  
 Thickness of Component 1 (L<sub>1</sub>): 20.8 mm  
 Thickness of Component 2 (L<sub>2</sub>): 12.58 mm

**Bolt Parameters**  
 Major Diameter of Threads (d): 8 mm  
 Pitch of Threads (p): 1 mm  
 Length of Shank (L<sub>s</sub>): 6.7 mm  
 Length of Unengaged Thread (L<sub>uneng</sub>): 22.8 mm  
 Length of Engaged Thread (L<sub>eng</sub>): 12.8 mm  
 Thread Angle (beta): 60 deg  
 Inner Contact Diameter of Bolt Head (d<sub>i</sub>): 8.25 mm  
 Outer Contact Diameter of Bolt Head (d<sub>o</sub>): 14.8 mm

Diagrams: Bolt - Nut configuration, Tapped/Drilled hole configuration



# Current Issues

- The correct version of Matlab Runtime should be installed in the user's machine to run the MATLAB exe
- Applications created in different versions would require different versions of runtime requiring the user to have all the Matlab Compiler Runtimes (MCRs) installed
- Though the process is automated here at MRV, it is only for a single version of MCR
- Across different Mahindra divisions: Mahindra Trucks and Buses in Pune, Mahindra Electric in Bangalore and Swaraj in Mohali it becomes a tedious task to ensure runtime installation in users' machines and always requires the local IT to intervene for the installation


# What Next?

## Projects

- 1D mechanical system modeling using Simscape
- Enhancing Data Analytics capabilities using Deep Learning and Computer Vision toolbox

## MATLAB's Web Apps

- Web apps are MATLAB apps that can run in a web browser
- Hosted using MATLAB Web App Server. Each web app has a unique URL and can be accessed from a web browser using HTTP or HTTPS protocols
- Web apps are designed to run only within a trusted intranet environment, not in the open Internet
- Apps and components can be shared as both standalone desktop applications and as software components to integrate with web and enterprise applications

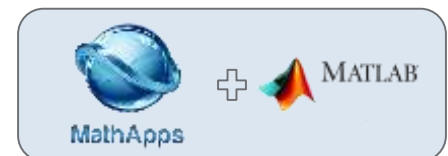

# Key Takeaways

- MATLAB GUIDE/App designer helps create customize UI based on the application requirements
- Using the Compiler we are able to create a standalone MATLAB application that doesn't require MATLAB license
- The MATLAB application is integrated with MathApps, which is a unified web portal covering –MATLAB and multiple platforms catering to the needs of all the system designers
- MathApps also acts as a repository for all the Knowledge Management Documents
- User Statistics helps gauge impact of the developed applications



MathApps

QUESTIONS?



# Thank you

## Disclaimer

Mahindra & Mahindra herein referred to as M&M, and its subsidiary companies provide a wide array of presentations and reports, with the contributions of various professionals. These presentations and reports are for informational purposes and private circulation only and do not constitute an offer to buy or sell any securities mentioned therein. They do not purport to be a complete description of the markets conditions or developments referred to in the material. While utmost care has been taken in preparing the above, we claim no responsibility for their accuracy. We shall not be liable for any direct or indirect losses arising from the use thereof and the viewers are requested to use the information contained herein at their own risk. These presentations and reports should not be reproduced, re-circulated, published in any media, website or otherwise, in any form or manner, in part or as a whole, without the express consent in writing of M&M or its subsidiaries. Any unauthorized use, disclosure or public dissemination of information contained herein is prohibited. Unless specifically noted, M&M or any of its subsidiary companies is not responsible for the content of these presentations and/or the opinions of the presenters. Individual situations and local practices and standards may vary, so viewers and others utilizing information contained within a presentation are free to adopt differing standards and approaches as they see fit. You may not repackage or sell the presentation. Products and names mentioned in materials or presentations are the property of their respective owners and the mention of them does not constitute an endorsement by M&M or its subsidiary companies. Information contained in a presentation hosted or promoted by M&M is provided “as is” without warranty of any kind, either expressed or implied, including any warranty of merchantability or fitness for a particular purpose. M&M or its subsidiary companies assume no liability or responsibility for the contents of a presentation or the opinions expressed by the presenters. All expressions of opinion are subject to change without notice.

**Mahindra**  
*Rise.*